


**MAGNETIC CONTACTORS
(MADE IN JAPAN)**

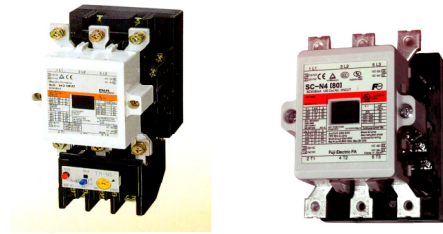

SIZE	MODEL	CONTACT ARRANGEMENT	CAPACITY		THERMAL CURRENT AMPERES	OPERATIONAL
			AC3	IEC 158-1		CURRENT AMPERES AT 440 V
0	SC-03	3P+1A	4	5.5	20	9
0A	SC-0	3P+1A	5.5	7.5	20	12
0.5	SC-4-0	3P+1A	7.5	10	25	16
1	SC-5-1	3P+1A1B	11	15	32	22
2	SC-N1	3P+2A2B	15	20	50	32
2N	SC-N2	"	18.5	25	60	40
2.5	SC-N2S	"	22	30	80	50
3	SC-N3	"	30	40	100	65
4	SC-N4	"	40	55	135	80
5	SC-N5	"	55	75	150	105
6	SC-N6	"	60	80	150	125
7	SC-N7	"	75	100	200	150
8	SC-N8	"	90	125	260	180
10	SC-N10	"	110	150	260	220
11	SC-N11	"	160	215	350	300
12	SC-N12	"	220	300	450	400
14	SC-N14	"	315	420	660	600
16	SC-N16	"	440	590	800	800

NOTE: SC-03 TO SC-N3 ARE ALSO SUITABLE FOR DIN RAIL MOUNTING

AUXILIARY CONTACTORS



SH-4/8-pole

SH - 4 4NO + 4NC

AUXILIARY CONTACT BLOCKS

SZ - A11	1NO + 1NC	(TOP MOUNTING)	FOR SC-03 To SC-N3
SZ - A22	2NO + 2NC	(TOP MOUNTING)	FOR SC-03 To SC-N3
SZ - AS2	1NO + 1NC	(SIDE MOUNTING)	FOR SC-N4 To SC-N12